

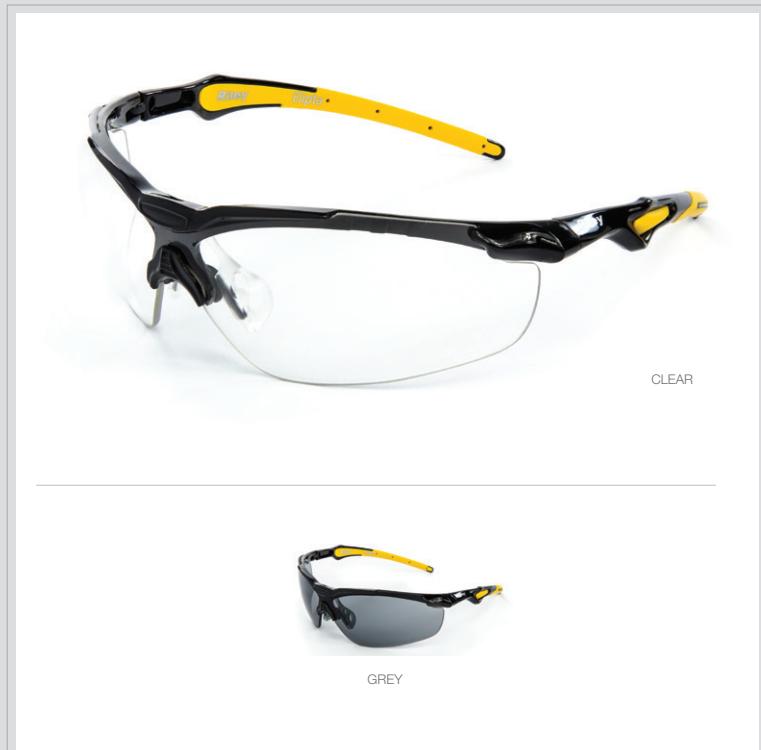
With a contemporary and sporty design, ELIPTA™ safety glasses feature an adjustable nose bridge and flexible temples to provide sturdy and comfortable protection for a wide variety of applications.

## SPECIAL FEATURES

- ✓ Contemporary sports style frame
- ✓ Soft adjustable non-slip TPE universal nose-bridge
- ✓ Soft flexible co-injected temples further maximise wearer comfort
- ✓ Supplied with a microfibre storage pouch
- ✓ Weight: 28g
- ✓ 8-Base lens



TEMPFLEX

SPORTS  
STYLESOFT  
TPEADJUSTABLE  
NOSE BRIDGE

VERSIONS	REF.	LENS MARKING	FRAME MARKING	PROTECTION AGAINST	COATINGS
CLEAR	<input type="radio"/>	2C-1.2 E 1FTKN CE	E EN 166 FT CE	Impacts, UV radiations	TECTON K&N Anti-scratch and Anti-fog
GREY	<input checked="" type="radio"/>	5-2.5 E 1FTKN CE	E EN 166 FT CE	Impacts, UV and Solar radiations	

See overleaf for this product's technical specification

## GENERAL SPECIFICATION

LENS BASE	8mm
WEIGHT	28g

## PACKAGING

Individually contained in a polythene bag with a Euroslot

PER BOX	10
PER CARTON	200

## COMPONENT SPECIFICATION

COMPONENT	MATERIAL	FEATURES
LENS	Polycarbonate	One piece, moulded
NOSE BRIDGE	Thermoplastic Elastomers (TPE)	Comfortable, flexible and adjustable
TEMPLE	Polycarbonate/ Thermoplastic Elastomers (TPE)	Co-injected - Robust, flexible and lightweight
HINGE	Polycarbonate/Metal	Increased strength

## LENS MARKINGS

### LENS FILTER TYPE:

- 2C UV
- 5 Solar

### SCALE NUMBER (SHADE):

- 1.2 Clear or Amber
- 2.5 Grey

e Identity of manufacturer

### OPTICAL CLASS:

- 1 High optical quality

### MECHANICAL STRENGTH:

- F Low energy impact, resists a 6mm, 0.86g ball at 45m/s
- T Protection against high-speed particles at extreme temperatures

### PERFORMANCE:

- K Resistance to scratches by fine particles
- N Resistance to fogging

CE Certification mark

## FRAME MARKINGS

e Identity of manufacturer

**EN 166:** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### MECHANICAL STRENGTH:

- F Low energy impact, resists a 6mm, 0.86 g ball at 45m/s
- T Protection against high-speed particles at extreme temperatures

CE Certification mark

## CLEANING AND STORAGE

**CLEANING:** The lenses should be cleaned regularly.

**MAINTENANCE:** Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

**STORAGE:** All products must be stored in a dry and clean environment.

## PART OF THE GLOBUS GROUP

Based on a substantial heritage of successfully protecting hands, Globus has grown to become one of the world leaders in worker safety, leading the way in technical innovation to provide a range of products that have set the standard for safety, productivity and wearer acceptance.

This focus on creating cutting edge personal protection solutions has now extended to eye and face protection with Riley; a new collection of high performance protective eyewear products engineered with innovation and ingenuity, designed for optimum comfort and styled for safe working.

Riley product approval certificates to CE standards will be provided on request. Riley is a registered trademark.

[www.riley-eyewear.com](http://www.riley-eyewear.com)

E: info@riley-eyewear.com

T: +44 (0)161 877 4747

F: +44(0)161 877 4746

Globus (Shetland) Ltd, 14 Central Park, Mosley Road, Manchester, M17 1NY, UNITED KINGDOM

EC-Type certification issued by:  
0530: CERTOTTICA SCARL, Zona Industriale Villanova, 32013 - Longarone (BL), Italy  
0194: INSPEC, 56 Leslie Hough Way, Salford, Greater Manchester, M6 6AJ, United Kingdom

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment.  
The manufacturer reserves the right to make any modifications it deems necessary.

